Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 24942

Order this document by MC1350/D

MOTOROLA

MC1350

Monolithic IF Amplifier

The MC1350 is an integrated circuit featuring wide range AGC for use as an IF amplifier in radio and TV over an operating temperature range of 0° to +75°C.

- Power Gain: 50 dB Typ at 45 MHZ
  50 dB Typ at 58 MHZ
- AGC Range: 60 dB Min, DC to 45 MHz
- Nearly Constant Input & Output Admittance over the Entire AGC Range
- Y_{21} Constant (–3.0 dB) to 90 MHz
- Low Reverse Transfer Admittance: < < 1.0 μmho Typ
- 12 V Operation, Single–Polarity Power Supply

IF AMPLIFIER

SEMICONDUCTOR TECHNICAL DATA



P SUFFIX
PLASTIC PACKAGE
CASE 626

D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO–8)



MAXIMUM RATINGS (T_A = +25°C, unless otherwise noted.)

Rating	Symbol	Value	Unit
Power Supply Voltage	V^+	+18	Vdc
Output Supply Voltage	V_1, V_8	+18	Vdc
AGC Supply Voltage	V_{AGC}	V^+	Vdc
Differential Input Voltage	V_{in}	5.0	Vdc
Power Dissipation (Package Limitation) Plastic Package Derate above 25°C	P_D	 625 5.0	 mW mW/°C
Operating Temperature Range	T_A	0 to +75	°C

ORDERING INFORMATION

Device	Operating Temperature Range	Package
MC1350P	T_A = 0° to +75°C	Plastic DIP
MC1350D		SO–8

Figure 1. Typical MC1350 Video IF Amplifier and MC1330 Low–Level Video Detector Circuit

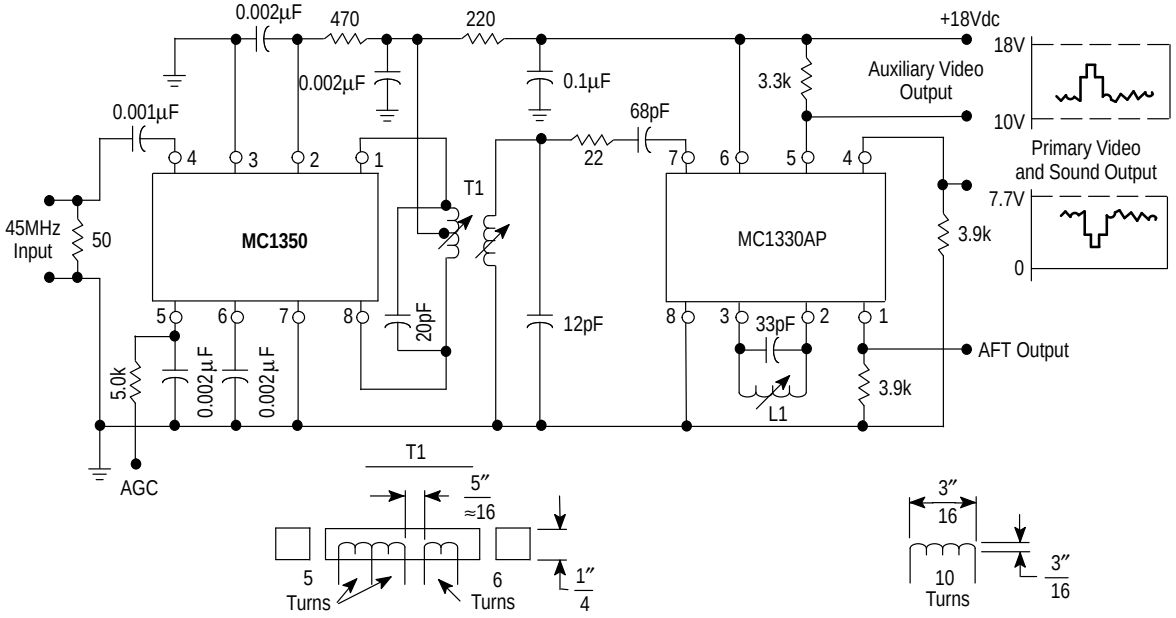

All windings #30 AWG tinned nylon acetate wire tuned with Carbonyl E or J slugs.

L1 wound with #26 AWG tinned nylon acetate wire tuned by distorting winding.

© Motorola, Inc. 1996

ELECTRICAL CHARACTERISTICS (V^+ = +12 Vdc, T_A = +25°C, unless otherwise noted.)

Characteristics	Symbol	Min	Typ	Max	Unit
AGC Range, 45 MHz (5.0 V to 7.0 V) (Figure 1)		60	68	–	dB
Power Gain (Pin 5 grounded via a 5.1 kΩ resistor)	A_p				dB
f = 58 MHz, BW = 4.5 MHz See Figure 6(a)		–	48	–	
f = 45 MHz, BW = 4.5 MHz See Figure 6(a), (b)		46	50	–	
f = 10.7 MHz, BW = 350 kHz See Figure 7		–	58	–	
f = 455 kHz, BW = 20 kHz		–	62	–	
Maximum Differential Voltage Swing	V_O				V_{pp}
0 dB AGC		–	20	–	
–30 dB AGC		–	8.0	–	
Output Stage Current (Pins 1 and 8)	$I_1 + I_8$	–	5.6	–	mA
Total Supply Current (Pins 1, 2 and 8)	I_S	–	14	17	mAdc
Power Dissipation	P_D	–	168	204	mW

DESIGN PARAMETERS, Typical Values (V^+ = +12 Vdc, T_A = +25°C, unless otherwise noted.)

Parameter	Symbol	Frequency				Unit
		455 kHz	10.7 MHz	45 MHz	58 MHz	
Single–Ended Input Admittance	g_{11} b_{11}	0.31 0.022	0.36 0.50	0.39 2.30	0.5 2.75	mmho
Input Admittance Variations with AGC (0 dB to 60 dB)	Δg_{11} Δb_{11}	– –	– –	60 0	– –	μmho
Differential Output Admittance	g_{22} b_{22}	4.0 3.0	4.4 110	30 390	60 510	μmho
Output Admittance Variations with AGC (0 dB to 60 dB)	Δg_{22} Δb_{22}	– –	– –	4.0 90	– –	μmho
Reverse Transfer Admittance (Magnitude)	$\lvert y_{12} \rvert$	< < 1.0	< < 1.0	< < 1.0	< < 1.0	μmho
Forward Transfer Admittance						
Magnitude	$\lvert y_{21} \rvert$	160	160	200	180	mmho
Angle (0 dB AGC)	$< y_{21}$	–5.0	–20	–80	–105	Degrees
Angle (–30 dB AGC)	$< y_{21}$	–3.0	–18	–69	–90	Degrees
Single–Ended Input Capacitance	C_{in}	7.2	7.2	7.4	7.6	pF
Differential Output Capacitance	C_O	1.2	1.2	1.3	1.6	pF

Figure 2. Typical Gain Reduction

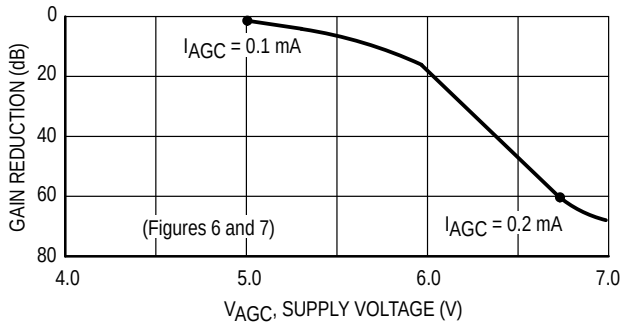

Figure 3. Noise Figure versus Gain Reduction

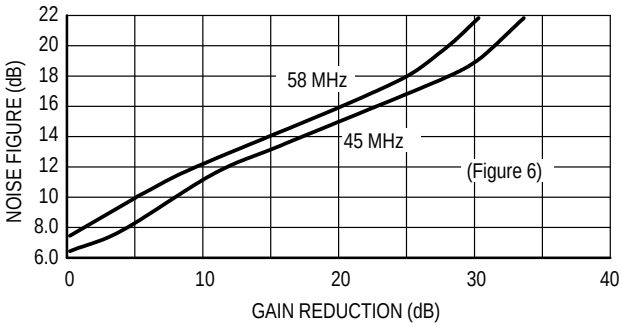

GENERAL OPERATING INFORMATION

The input amplifiers (Q1 and Q2) operate at constant emitter currents so that input impedance remains independent of AGC action. Input signals may be applied single–ended or differentially (for ac) with identical results. Terminals 4 and 6 may be driven from a transformer, but a dc path from either terminal to ground is not permitted.

Figure 4. Circuit Schematic

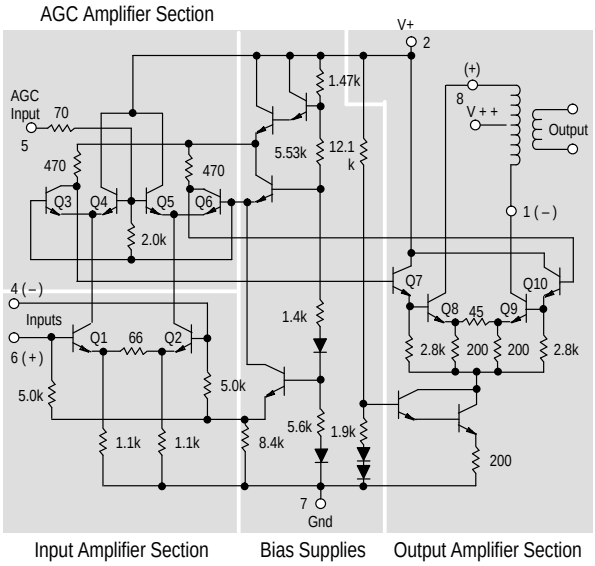

AGC action occurs as a result of an increasing voltage on the base of Q4 and Q5 causing these transistors to conduct more heavily thereby shunting signal current from the interstage amplifiers Q3 and Q6. The output amplifiers are supplied from an active current source to maintain constant quiescent bias thereby holding output admittance nearly constant. Collector voltage for the output amplifier must be supplied through a center–tapped tuning coil to Pins 1 and 8. The 12 V supply (V^+) at Pin 2 may be used for this purpose, but output admittance remains more nearly constant if a separate 15 V supply (V^+ $^+$) is used, because the base voltage on the output amplifier varies with AGC bias.

Figure 5. Frequency Response Curve (45 MHz and 58 MHz)

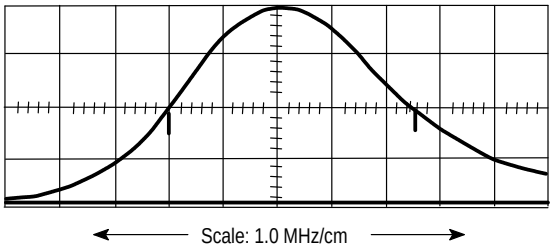

Figure 6. Power Gain, AGC and Noise Figure Test Circuits

(a) 45 MHz and 58 MHz

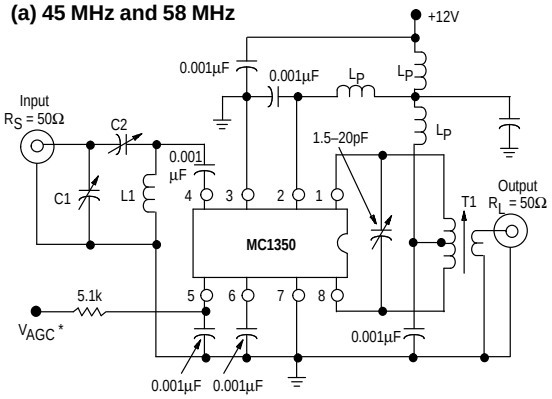

*Connect to ground for maximum power gain test.
All power supply chokes (Lp), are self–resonant at input frequency. Lp ≥ 20 kΩ.
See Figure 5 for Frequency Response Curve.

L1 @ 45 MHz = 7 1/4 Turns on a 1/4″ coil form
@ 58 MHz = 6 Turns on a 1/4″ coil form

T1 Primary Winding = 18 Turns on a 1/4″ coil form, center–tapped, #25 AWG
Secondary Winding = 2 Turns centered over Primary Winding @ 45 MHz
= 1 Turn @ 58 MHz
Slug = Carbonyl E or J

(b) Alternate 45 MHz

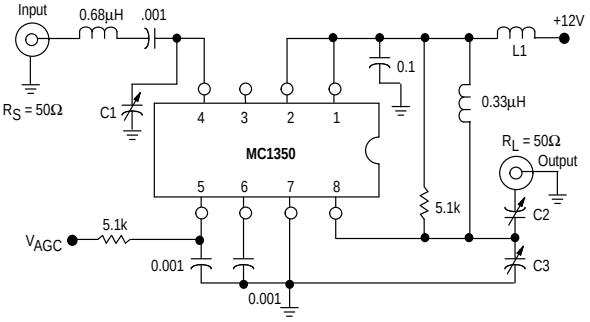

L1	Ferrite Core 14 Turns 28 S.W.G.
C1	5–25 pF
C2	5–25 pF
C3	5–25 pF

	45 MHz		58 MHz	
L1	0.4 µH	Q ≥ 100	0.3 µH	Q ≥ 100
T1	1.3 µH to 3.4 µH	Q ≥ 100 @ 2.0 µH	1.2 µH to 3.8 µH	Q ≥ 100 @ 2.0 µH
C1	50 pF to160 pF		8.0 pF to 60 pF	
C2	8.0 pF to 60 pF		3.0 pF to 35 pF	

Figure 7. Power Gain and AGC Test Circuit (455 kHz and 10.7 MHz)

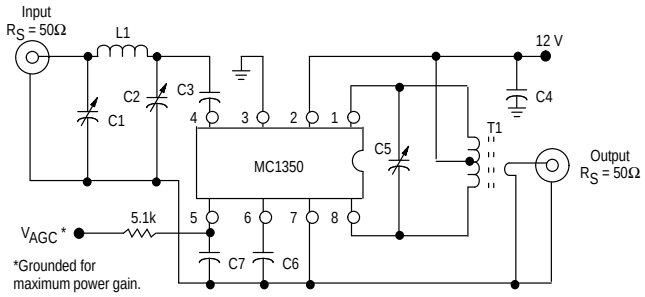

Component	Frequency	
	455 kHz	10.7 MHz
C1	–	80–450 pF
C2	–	5.0–80 pF
C3	0.05 µF	0.001 µF
C4	0.05 µF	0.05 µF
C5	0.001 µF	36 pF
C8	0.05 µF	0.05 µF
C7	0.05 µF	0.05 µF
L1	–	4.6 µF
T1	Note 1	Note 2

NOTES: 1. Primary: 120 µH (center–tapped)
Q_u = 140 at 455 kHz
Primary: Secondary turns ratio ≈ 13
2. Primary: 6.0 µH
Primary winding = 24 turns #36 AWG
(close–wound on 1/4″ dia. form)
Core = Carbonyl E or J
Secondary winding = 1–1/2 turns #36 AWG, 1/4″ dia.
(wound over center–tap)

Figure 8. Single–Ended Input Admittance

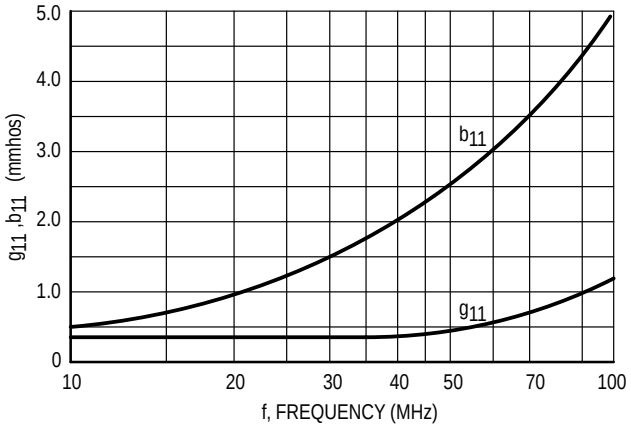

Figure 9. Forward Transfer Admittance

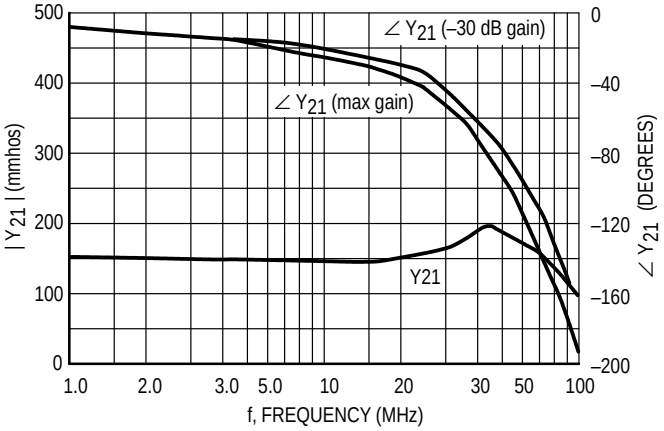

Figure 10. Differential Output Admittance

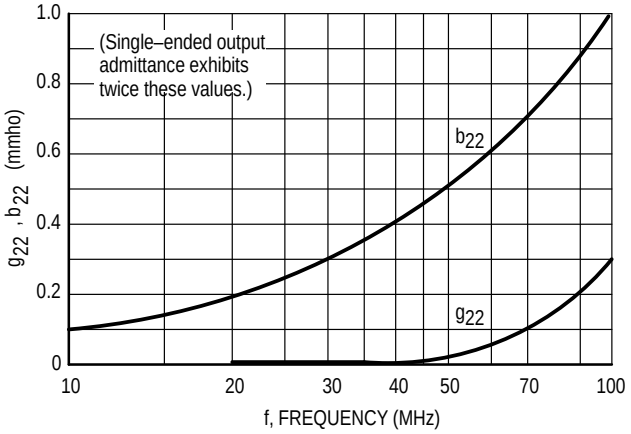

Figure 11. Differential Output Voltage

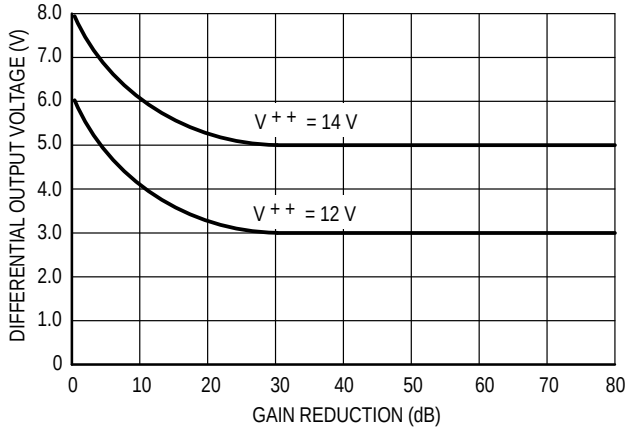

OUTLINE DIMENSIONS

P SUFFIX
PLASTIC PACKAGE
CASE 626–05
ISSUE K

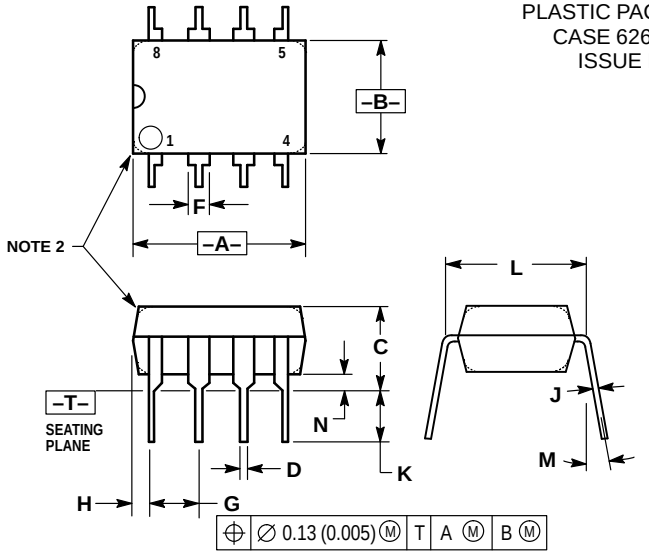

NOTES:
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	—	10°	—	10°
N	0.76	1.01	0.030	0.040

D SUFFIX
PLASTIC PACKAGE
CASE 751–05
(SO–8)
ISSUE N

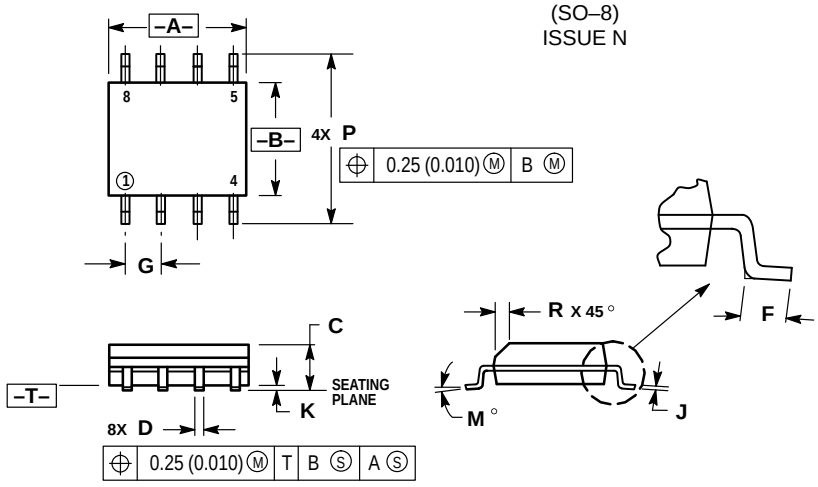

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.18	0.25	0.007	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:
USA / EUROPE / Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE 602–244–6609
INTERNET: http://Design–NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298